


DATA SHEET **SERVICE LINE CLASSIC**

Dumbwaiter



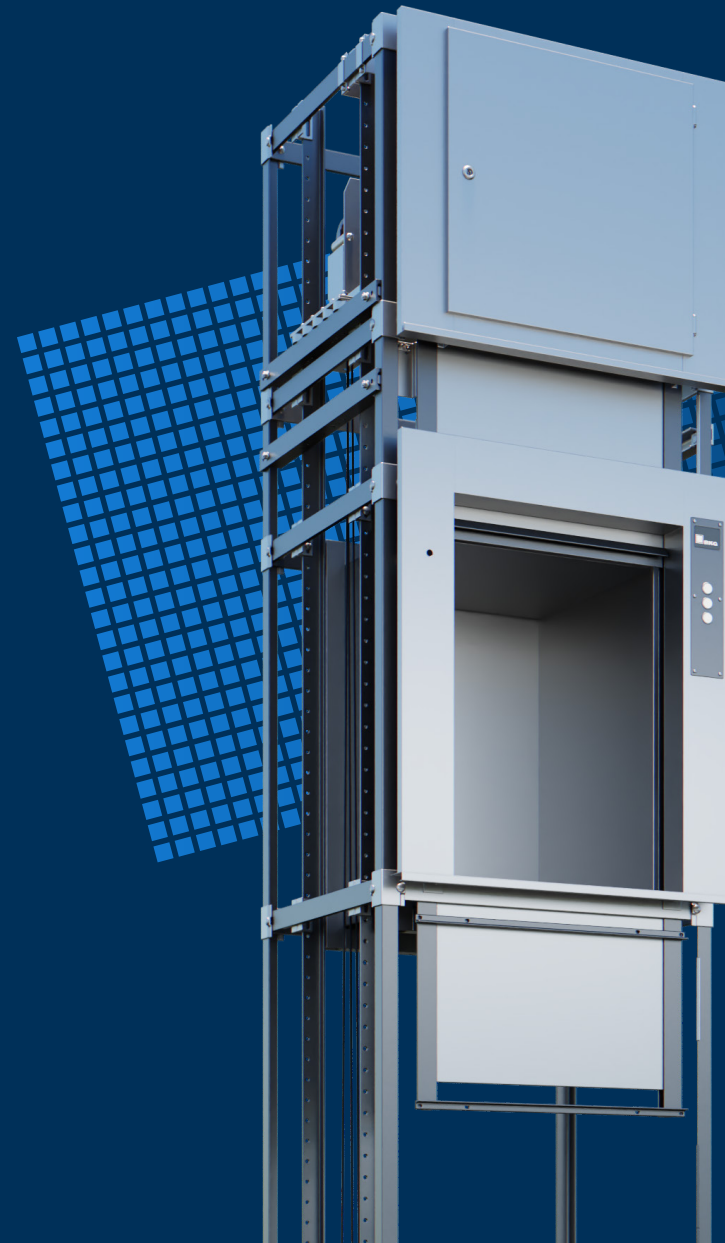

BKG

Dumbwaiter | EN 81-3 / Machinery directive 2006/42/EG

Basic data:

- Load capacity 50 - 300 kg
- Up to 3 access sides
- With vertical bi-parting doors at serving level
- Motor arrangement at the top, side or bottom of the shaft
- Nominal speed up to 0.45 m/s
- With safety gear for accessible spaces under the shaft

Basic equipment:

- Car and landing doors with Zintec steel for individual colouring
- Hot-dip galvanised shaft structure for installation in an on-site shaft
- Short assembly times due to pre-assembled components
- Drive with compact worm gear
- Microprocessor control completely pre-wired and pluggable in 24 volt technology
- Call and send control
- Call acknowledgement, arrival signal and position indicator
- Diagnostic system

Optional:

- Up to 30 stops
- Head up to 120 m
- Nominal speed up to 1.0 m/s
- Fire doors based on EN 81-58
- Car closure or load restraint
- Frequency control
- Floor and underfloor heating
- LED car lighting and LED shaft lighting
- Overload protection
- Automatic vertical bi-parting doors
- Materials and surfaces according to customer requirements
- Special functions and displays
- Intercom systems
- Water/dust protection (IP)
- Special solutions for reduced shaft conditions
- Special car dimensions

Car dimensions:

- Width: 350 – 1000 mm
- Depth: 320 – 1000 mm
- Height: 600 – 1200 mm

