






DATA SHEET **SERVICE** LINE DOC

Dumbwaiter

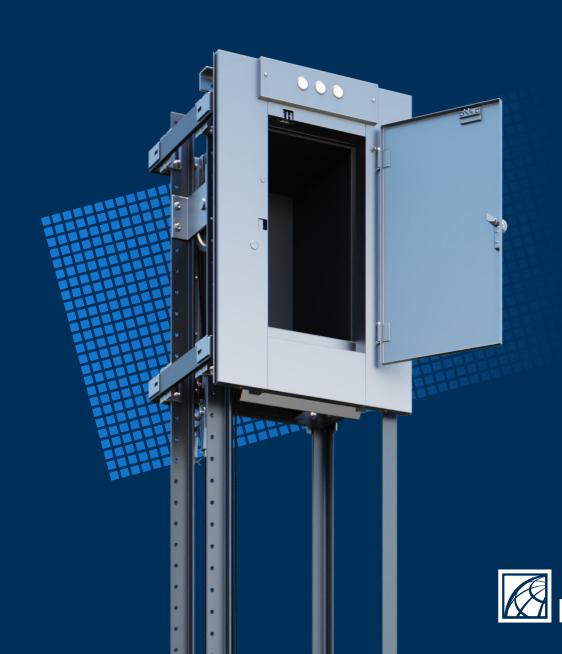



BKG Dumbwaiter | EN 81-3 / Machinery directive 2006/42/EG

Basic data:

- Load capacity 5 kg
- One-sided or through-loading
- With hinged doors on serving level
- Motor arrangement at the top or side of the shaft
- Nominal speed 0.35 m/s

Basic equipment:

- Car and landing doors with Zintec steel for individual colouring
- Hot-dip galvanised shaft structure for installation in an on-site shaft
- Short assembly times due to pre-assembled components
- Drive with compact worm gear
- Microprocessor control completely pre-wired and pluggable in 24 volt technology
- Call and send control
- Call acknowledgement, arrival signal and position indicator
- Diagnostic system

Optional:

- Increase the load capacity to 20 kg
- Deviating car dimensions
- Frequency control
- Materials and surfaces according to customer requirements
- Intercom systems

Car dimensions:

Width: 250 / 350 mm Depth: 310 mm Height: 500 mm

